

◆ Feature

1. Automatic process.
2. Available in magnetically shielded.
3. New designed terminal for low cost.
4. Low DC resistance.
5. Low profile and high currents.
6. RoHS compliant.



◆ Application

Excellent for power line DC-DC conversion applications used in power switching, such as Mobile phone, MP3 / MP4, DSC / DVC, PDA / GPS, Portable Hard Disk / TV.

◆ How to Order


IPI 2D14 N 3R3 N A1
 (1) (2) (3) (4) (5) (6)

- (1) Product Series
- (2) Dimensions
- (3) Model code
- (4) Inductance Code
- (5) Inductance Tolerance Code: M-±20%, N-±30%
- (6) Control S/N

◆ Dimension

Unit: mm

Series	A	B	C	D	E	F	G
IPI2D14N Series	3.0±0.2	3.0±0.3	1.5 max.	1.5 typ.	0.76 typ.	1.2 typ.	0.7typ.

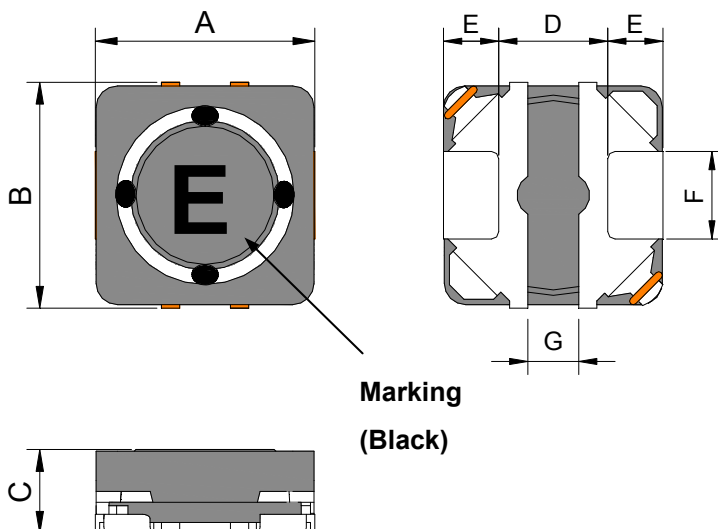

◆ Specification

Part Number	Inductance L (μH)	Rated Current		DCR (mΩ) ±20%
		I _{RMS} (A)	I _{SAT} (A)	
IPI2D14N-1R5N-A1	1.5	1.66	2	70
IPI2D14N-1R8N-A1	1.8	1.56	1.7	80
IPI2D14N-2R2N-A1	2.2	1.4	1.5	90
IPI2D14N-2R7N-A1	2.7	1.3	1.4	100
IPI2D14N-3R3N-A1	3.3	1.25	1.3	110
IPI2D14N-3R9N-A1	3.9	1.2	1.2	120
IPI2D14N-4R7M-A1	4.7	1.1	1	160
IPI2D14N-5R6M-A1	5.6	1.05	0.9	170
IPI2D14N-6R8M-A1	6.8	1	0.85	230
IPI2D14N-8R2M-A1	8.2	0.95	0.8	280
IPI2D14N-100M-A1	10	0.85	0.75	360
IPI2D14N-120M-A1	12	0.77	0.62	420
IPI2D14N-150M-A1	15	0.67	0.58	500
IPI2D14N-180M-A1	18	0.56	0.54	590
IPI2D14N-220M-A1	22	0.5	0.48	720
IPI2D14N-270M-A1	27	0.45	0.4	820

Note:

1. Test Frequency - L : 100KHz / 0.1Vdc
2. Testing Instrument - L : HP4285A, RDC : Chroma 16502
3. Heat Rated Current (I_{rms}) - Based on temperature rise (ΔT : 40°C TYP.).
4. Saturation Current (I_{sat}) - Based on inductance change ($\Delta L/L_0$: $\leq -30\%$) @ ambient temp. 25°C

◆ Package

Dimensions	Height			
	1.0 mm	1.2 mm	1.5 mm	1.6~2.0 mm
3.0x3.0 mm	IPC3010F	IPI2D11N	IPI2D14N	IPI2D18N
		IPC3012F	IPC3015F	IPC3020F
4.0x4.0 mm	IPC4010F	IPI3D11N	IPI3D14N	IPI3D16N
		IPC4012F	IPC4015F	IPC4018F
5.0x5.0 mm	IPC5010F	IPI4D11NT	IPI4D14N	IPI4D18N
		IPC5012F	IPC5015F	IPC5020F
Package				
Standard Packing Quantity (pcs/reel)		3000		