◆ Feature

1.High gain
2.Customization available
3.Pin type
4.Compact size and low profile
5.RoHS compliant

RoHS

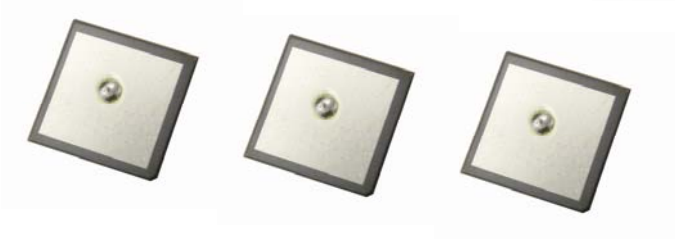

◆ Application

Automobile, Marine, Aviation, Handheld Device

◆ Dimension (mm): 18.4×18.4×4

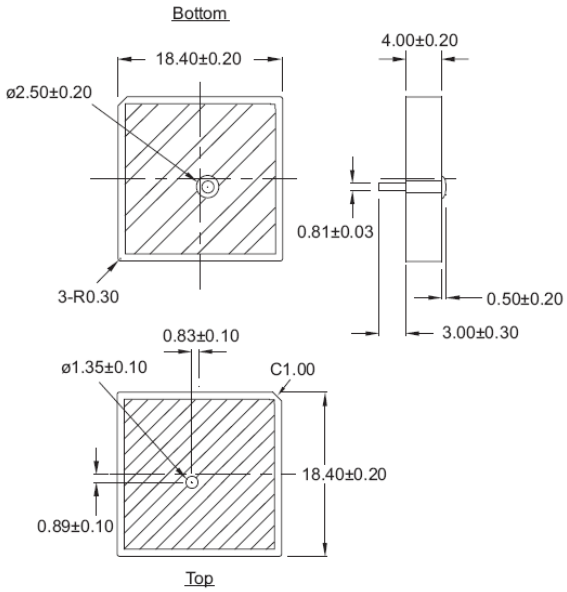

◆ Specification

Center Frequency (MHz)	1580±2
Bandwidth (MHz)	9.0 min.
Gain at Zenith (dBic)	2.5 typ.
Gain at 10° Elevation (dBic)	-4.5 typ.
Polarization	R.H.C.P.
Impedance (Ω)	50 typ.
Frequency Temperature Coefficient (ppm/℃)	0±20
Axial Ratio (dB)	≦ 3
Testing Condition	J Type: 50 mm Square Ground Plane
Package	J type: 50 pcs/tray