

### ◆ Feature

- 1.High gain
- 2.Customization available
- 3.Pin type
- 4.Compact size and low profile
- 5.RoHS compliant




### ◆ Application

Automobile, Navigator, Marine, Aviation, Handheld Device



### ◆ Dimension (mm): 15×15×4

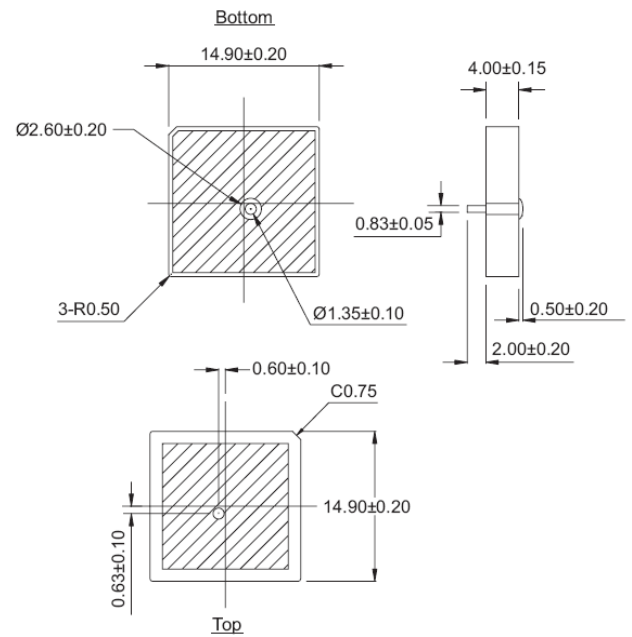

### ◆ Specification

Center Frequency (MHz)	$1580 \pm 1.5$
Bandwidth (MHz)	6.0 min.
Gain at Zenith (dBic)	2.0 typ.
Gain at 10° elevation (dBic)	-4.5 typ.
Polarization	R.H.C.P.
Impedance ( $\Omega$ )	50 typ.
Frequency Temperature Coefficient (ppm/°C)	$0 \pm 20$
Axial Ratio (dB)	$\leq 3$ dB
Testing Condition	K Type: 40 mm Square Ground Plane
Package	K type: 70 pcs/tray