

TCL 0804 H 900 04 A Engineering Specification

1.Scope

TCL 0804 H Series is a thin film common mode filter array designed to suppress common mode noise for high speed differential data lines, such as USB 2.0, IEEE 1394, LVDS, DVI, **HDMI**, and **MIPI**.


These differential interfaces can be used in personal computers, note books, LCD monitors, LCD/PDP/DLP TVs, Blue-ray/DVD players, personal handheld equipments, etc.

2.Explanation of Part Number

TCL	0804	H	900	04	A
(1)	(2)	(3)	(4)	(5)	(6)

- (1) Product Type : TCL= Thin Film Common Mode Filter, Low Profile
 (2) EIA Dimension Code
 (3) Speed Identification Code: H= High Speed
 (4) Impedance(at 100MHz): 900= 90Ω
 (5) Line Code: 04= 4 lines
 (6) Specialized Specification Code

3.Circuit Diagram & Dimension

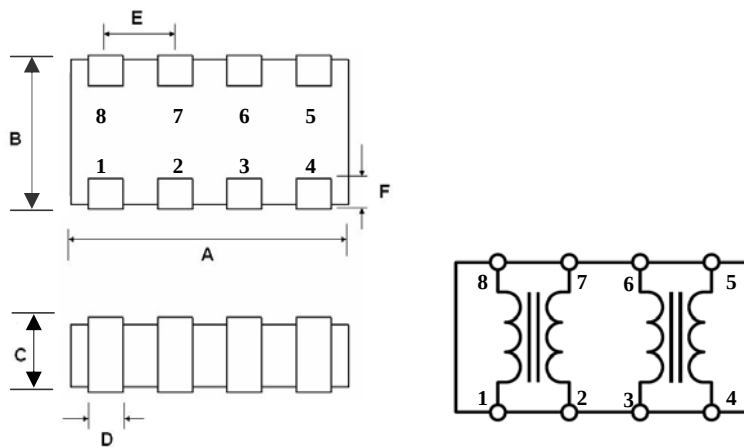

Unit: mm

Series	A	B	C	D	E	F
TCL 0804	2.0±0.2	1.0±0.15	0.5±0.1	0.2±0.15	0.5±0.1	0.2±0.15

4. Specifications

4.1. ABSOLUTE MAXIMUM RATINGS


PARAMETER	PARAMETER	RATING	UNITS
Rated Voltage	V_{DC}	5	V
Rated Current	I_{DC}	130	mA
Lead Soldering Temperature	T_{SOL}	260 (10 sec.)	$^{\circ}C$

4.2. ELECTRICAL CHARACTERISTICS


PARAMETER	MIN	TYP	MAX	UNITS
Common Mode Impedance (at 100 MHz)	67	90	112	Ω
Cut-off Frequency		4		GHz
DC Resistance			3	Ω
Insulation Resistance	10			M Ω

4.3. TYPICAL CHARACTERISTICS

Impedance vs Frequency Characteristics**

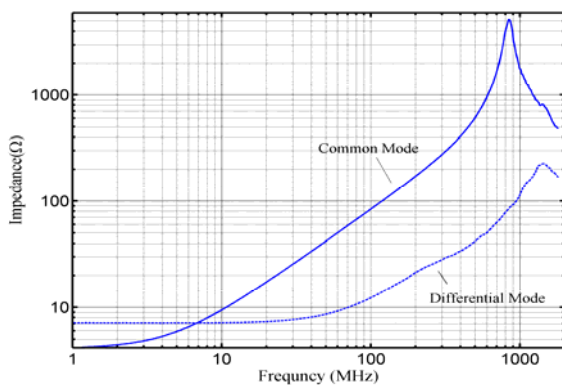


Insertion Loss vs Frequency Characteristics**

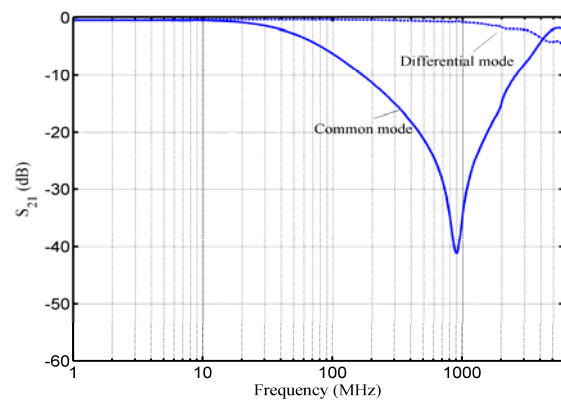

*Test Instrument: Agilent E4991A Impedance/Material Analyzer


**Test Instrument: Agilent E5071C ENA Series Network Analyzer

5.LAND LAYOUT

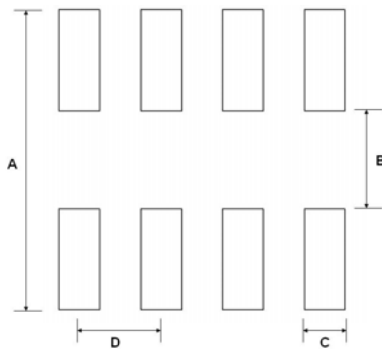

	mm
A	1.4
B	0.4
C	0.25
D	0.5


6.Recommendable reflow soldering

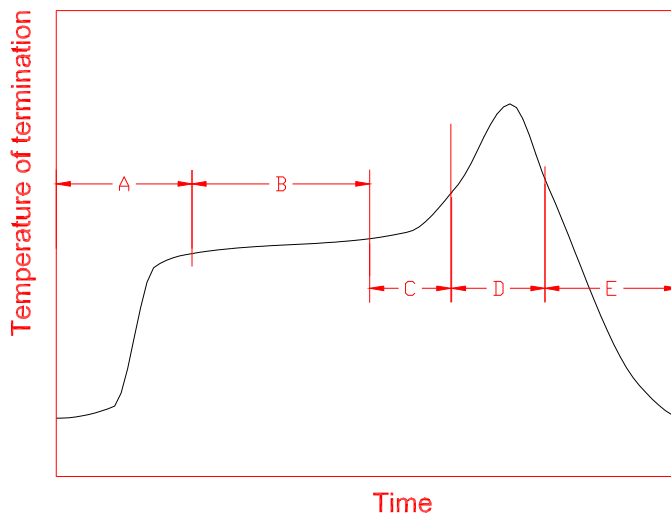

A	1 st rising temperature	The normal to Preheating temperature	30s to 60s
B	Preheating	140°C to 160°C	60s to 120s
C	2 nd rising temperature	Preheating to 200°C	20s to 40s
D	Main heating	if 220°C if 230°C if 240°C if 250°C if 260°C	50s~60s 40s~50s 30s~40s 20s~40s 20s~40s
E	Regular cooling	200°C to 100°C	1°C/s ~ 4°C/s


- According to J-STD-020C

7. Tape and reel specifications

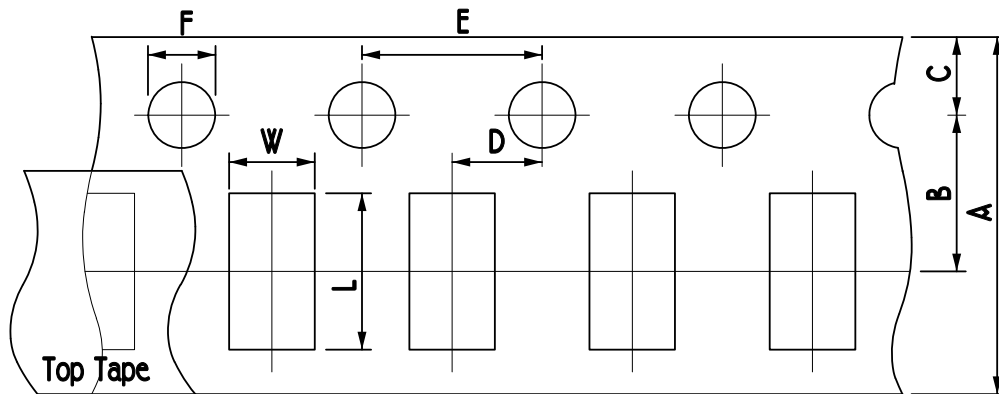

UNIT: mm

Type	A	B	C	D	E	F	L	W
0804	8.00± 0.30	3.50± 0.05	1.75± 0.10	2.00± 0.05	4.00± 0.10	1.50± 0.10	2.40± 0.20	1.35± 0.20

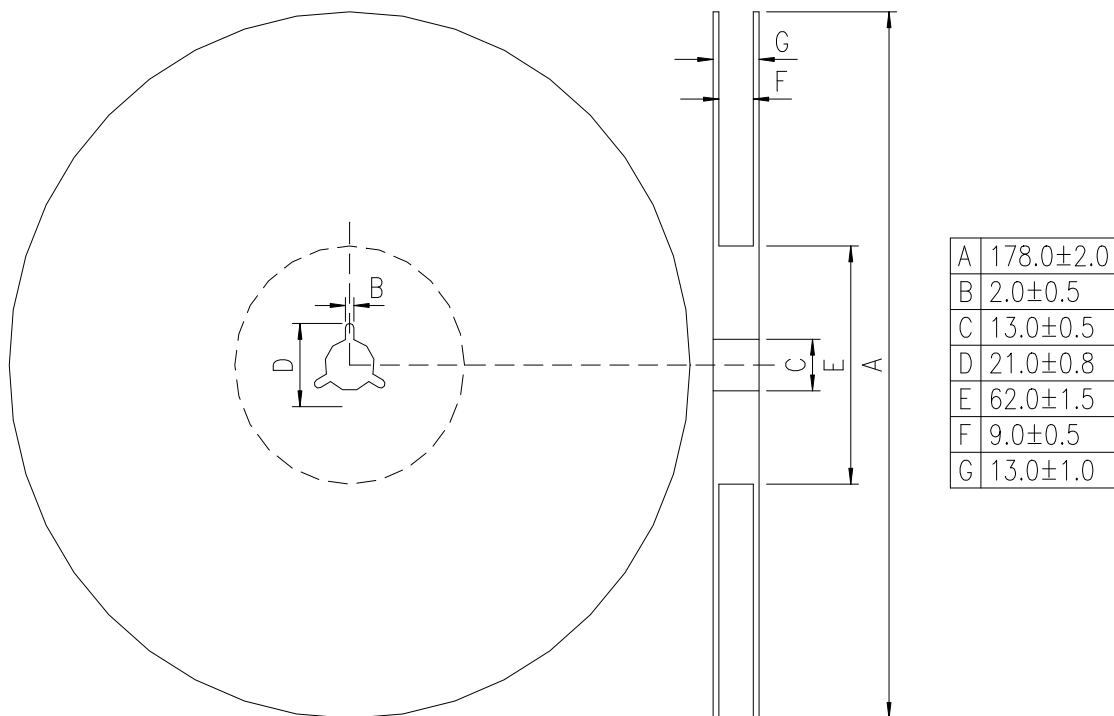

*Standard quantity : 5000pcs/Reel