

RoHS



WIP252010Q Series Engineering Specification

1. Scope

Feature


- Low Profile: 2.5 mm × 2.0 mm × 1.0 mm.
- Magnetically shielded structure to accomplish high resolution in EMC protection.
- Halogen free, Lead Free, RoHS Compliance.

Applications

WIP252010Q series is generic applied in portable DC to DC converter line.

- Mobile Phones
- HDDs,
- DSCs,
- Pads,
- LCD, LED display, etc..

2. Explanation of Part Number

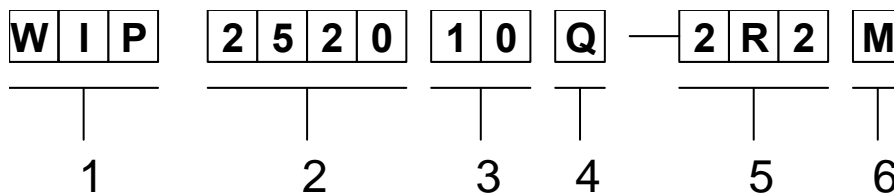


- ◆ 1 : Series Name, Wire-wound type power inductor,
- ◆ 2 : Size Code: The first two digitals: length(mm), The last two digitals: width(mm),
- ◆ 3 : Thickness (mm),
- ◆ 4 : Product Type,
- ◆ 5 : Inductance (μH),
- ◆ 6 : Model code, Inductance tolerance within ±20%,

3. Construction & Dimensions

3.1. Core Material: Iron

3.2. End termination: Ni/Sn

3.3. Construction & Dimension :

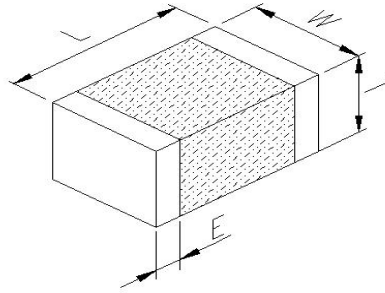

Unit: mm

L	W	T	E
2.5±0.2	2.0±0.2	1.0 max.	0.6±0.2

4. General specifications

4.1. Temperature Specifications

Operating Temperature range : -40°C to +125°C

Storage Temperature range : -50°C to +125°C

* The detail operating temperature describing can refer to 5.1 (7).



5. Performance Characteristics

5.1. Specifications

Part Number	Inductance, L ₀ (μH) @ 1MHz	Rdc (mΩ)		Saturation Current Isat (A),		Heat Rating Current I _{rms} (A),	
		Typical	Maximum	Typical	Maximum	Typical	Maximum
WIP252010Q-R47M	0.47	40	48	4.6	3.7	2.5	2.2
WIP252010Q-R68M	0.68	55	66	4.2	3.4	2.2	2.0
WIP252010Q-1R0M	1.0	80	96	3.4	2.7	1.9	1.7
WIP252010Q-1R5M	1.5	110	130	2.9	2.1	1.5	1.3
WIP252010Q-2R2M	2.2	150	180	2.4	1.9	1.3	1.1
WIP252010Q-3R3M	3.3	230	255	1.9	1.5	1.0	0.8
WIP252010Q-4R7M	4.7	350	385	1.6	1.4	0.9	0.8
WIP252010Q-6R8M	6.8	450	540	1.5	1.3	0.8	0.7
WIP252010Q-100M	10.0	710	856	1.3	1.1	0.6	0.5

- (1) All test data is referenced to 25°C ambient.
- (2) Inductance is measured with a LCR meter Agilent 4294A or equivalent.
(Test frequency : 1 MHz, test level : 1V)
- (3) Inductance Tolerance ±20%.
- (4) Isat: DC current that will cause L₀ to drop approximately 30% at ambient 25°C.
- (5) I_{dc}: DC current that will cause an approximate ΔT of 40°C.
- (6) Rating Current: Value as listed is either the saturation current or the heating current, whichever is smaller.
- (7) The part temperature (Ambient + temp rise) should not exceed 125°C under worse case operating condition.

5.2. Current Characteristic

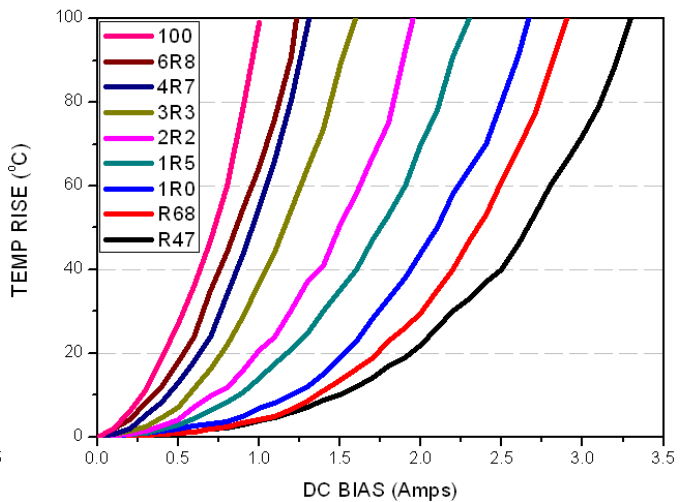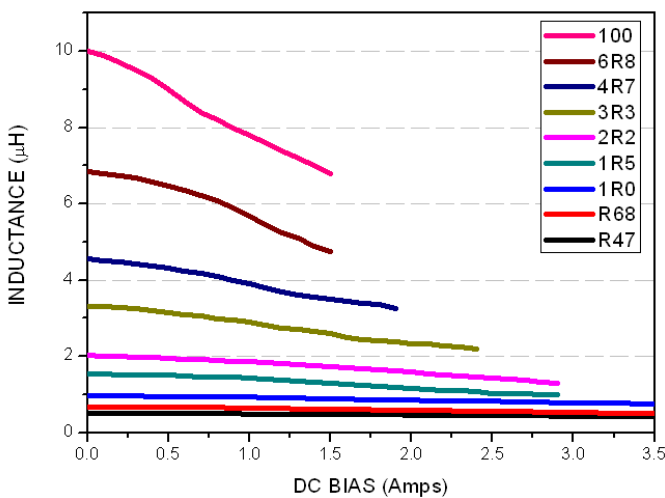


6. Reliability and Test Condition

Test item	Test condition	Criteria
Resistance to Solder Heat	1. Solder temperature : $260 \pm 5^{\circ}\text{C}$ 2. Flux : Rosin 3. DIP time : 10 ± 1 sec	1. More than 95 % of terminal electrode should be covered with new solder 2. No mechanical damage 3. Inductance value should be within ± 20 % of the initial value
Adhesive Test	1. Reflow temperature : 245°C It shall be Soldered on the substrate applying direction parallel to the substrate 2. Apply force(F) : 5 N 3. Test time : 10 sec	1. No mechanical damage 2. Soldering the products on PCB after the pulling test force > 5 N
Temperature Cycle	1. Temperature: $-50 \sim 125^{\circ}\text{C}$ For 30 minutes each 2. Cycle: 500 cycles 3. Measurement: At ambient temperature 24 hours after test completion	1. No mechanical damage 2. Inductance should be within $\pm 20\%$ of the initial value
Dry Heat Test	1. Temperature: $85 \pm 2^{\circ}\text{C}$ 2. Testing time: 500 hrs 3. Applied current: Full rated current 4. Measurement: At ambient temperature 24 hours after test completion	1. No mechanical damage 2. Inductance should be within $\pm 20\%$ of the initial value
Humidity Test	1. Temperature: $60 \pm 2^{\circ}\text{C}$ 2. Humidity: 90-95 % RH 3. Applied current: Full rated current 4. Testing time: 500 hrs 5. Measurement: At ambient temperature 24 hours after test completion	1. No mechanical damage 2. Inductance should be within $\pm 20\%$ of the initial value


7. Taping Package and Label Marking

7.1. Carrier tape dimensions

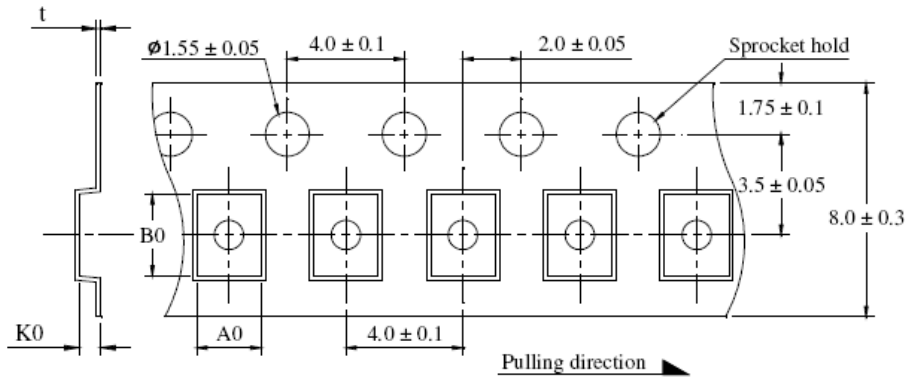

	A0	B0	K0	t
mm	2.25±0.1	2.80±0.1	1.35±0.1	0.22±0.05

7.2. Taping reel dimensions

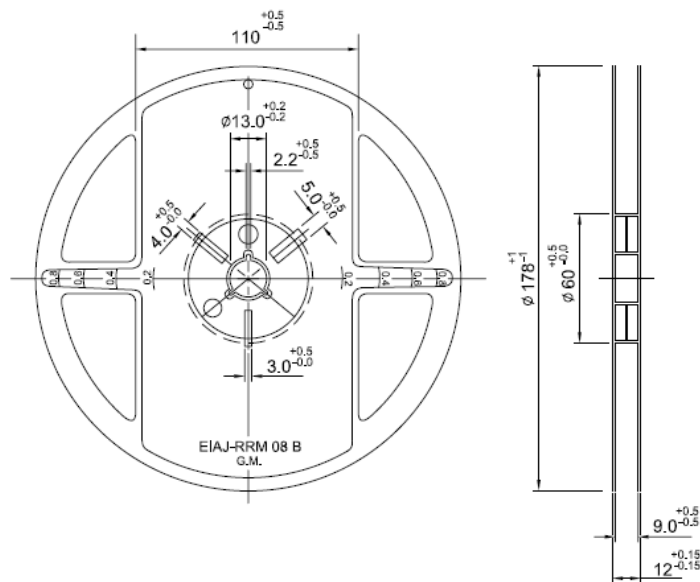

PART SIZE (EIA SIZE)	2520 (1008)
Qty.(pcs)	2,000
BOX	5 reels / inner box

7.3. Taping specifications

There shall be the portion having no product in both the head and the end of taping, and there shall be the cover tape in the head of taping.

7.4. Label Marking

The label specified as follows shall be put on the side of reel.

- (1) Part No.
- (2) Quantity
- (3) Lot No.

* Part No. And Quantity shall be marked on outer packaging.

7.5. Quantity of products in the taping package


- (1) Standard quantity : 2000pcs/Reel
- (2) Shipping quantity is a multiple of standard quantity.

8. Precautions for Handling

8.1. Solder cream in reflow soldering

Refer to the recommendable land pattern as printing mask pattern for solder cream.

- (1) Print solder in a thickness of 0.1 to 0.15 mm.

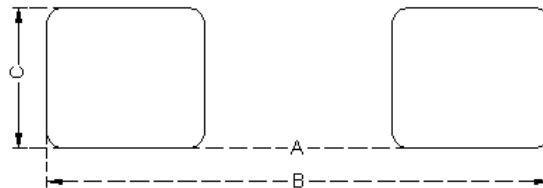

Size	A	B	C
2520	1.2	2.8	2.0

Unit: mm

8.2. Precaution for handling of substrate

Do not exceed to bend the board after soldering this product extremely.
(reference examples)


- Mounting place must be as far as possible from the position, which is close to the break line of board, or on the line of large holes of board.
- Do not bend extremely the board, in mounting another components.
If necessary, use back-up pin (support pin) to prevent from bending extremely.
- Do not break the board by hand. We recommend to use the machine or the jig to break it.

8.3. Precaution for soldering

Note that this product will be easily damaged by rapid heating, rapid cooling or local heating.

Do not give heat shock over 100°C in the process of soldering. We recommend to take preheating and gradual cooling.

8.4. Recommendable reflow soldering

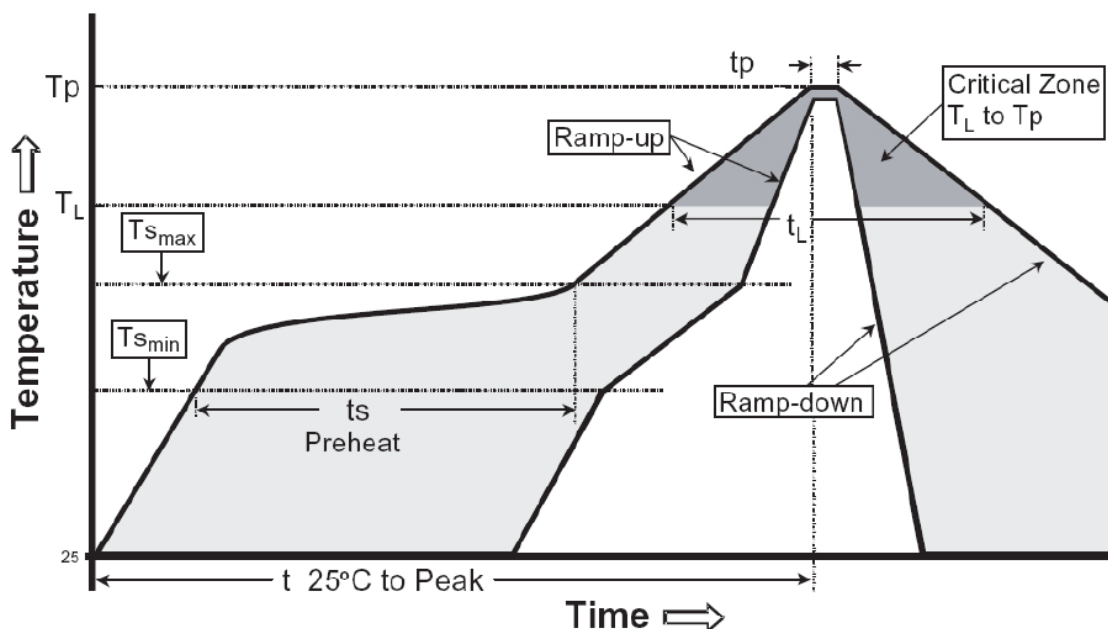

Reference IPC-020c-5-1

Profile Feature	Pb free Assembly
Average Ramp Rate (Ts max to Tp)	3 °C/second max
Preheat - Temperature Min (Ts _{min}) - Temperature Min (Ts _{max}) - Time(ts _{min} to ts _{min})	150°C 200°C 60-180 seconds
Time maintained above: - Temperature (TL) - Time (tL)	217°C 60-150 seconds
Peak Temperature (T _p)	260°C +0/-5 °C
Time within 5 °C of actual Peak Temperature (T _p)	20-40 seconds
Ramp-Down Rate	6 °C/second max.
Time 25°C to Peak Temperature	8 minutes max

8.5. Soldering gun procedure

Note the follows, in case of using solder gun for replacement.

- (1) The tip temperature must be less than 280°C for the period within 3 seconds by using soldering gun under 30 W.
- (2) The soldering gun tip shall not touch this product directly.

8.6. Soldering volume

Note that excess of soldering volume will easily get crack the body of this product.

8.7. Taping Package Storage Condition

Storage Temperature : 5 to 40 °C

Relative Humidity: < 65%RH

Storage Time : 12 months max