


LIA293A39N_

□ □ □

外觀&形狀

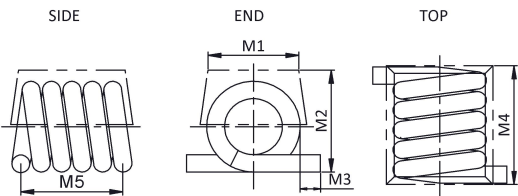

INPAQ TECHNOLOGY CO., LTD.

Unit:mm					
Series	M1	M2	M3	M4	M5
LIA293A	3.81 MAX.	4.2 MAX.	1.53±0.39	4.83 MAX.	4.32±0.39

規格

長(公釐)	4.83(Max)
寬(公釐)	3.81(Max)
高(公釐)	4.2(Max)
感值(nH)	39
公差	G($\pm 2\%$),J($\pm 5\%$),K($\pm 10\%$)
測試頻率(MHz)	150
最大值直流阻抗(m Ω)	4.4
最大溫升電流(A)	3
品質因素	100
自我諧振頻率[MHz]	2100
操作溫度 $^{\circ}\text{C}$	-40~+125

特點

- 1.1. Inductance values from 22 nH to 120 nH.
- 1.2. Exceptionally high Q even at low frequencies; Handles up to 3.5 Amps current.
- 1.3. Tight tolerance (as low as $\pm 2\%$) can eliminate circuit tuning.
- 1.4. Flat top jacket for mechanical stability and reliable pick and place operations.
- 1.5. Solder coated leads ensure reliable soldering.
- 1.6. High reliability tests comply with AEC-Q200.

包裝訊息

包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重t(gram)	濕敏等級
13	Plastic type	1	0.125	1