



LQA1515A47N_

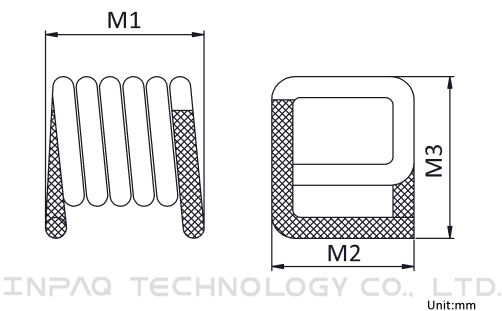

外觀&形狀

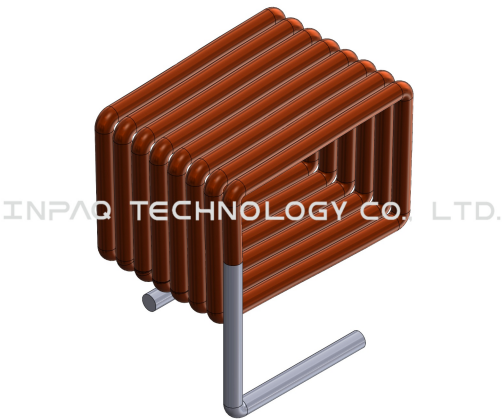

Series	M1	M2	M3
LQA1515A47N□	4.06±0.254	3.56±0.178	3.73±0.178
LQA1515A68N□	5.33±0.254	3.56±0.178	3.73±0.178
LQA1515A82N□	5.84±0.254	3.56±0.178	3.73±0.178

規格

長(公釐)	4.06±0.254
寬(公釐)	3.56±0.178
高(公釐)	3.73±0.178
感值(nH)	47
公差	G(±2%),J(±5%)
測試頻率(MHz)	400
最大值直流阻抗(mΩ)	6.35
最大溫升電流(A)	4.9
品質因素	230
自我諧振頻率[MHz]	1870
操作溫度°C	-40~+125

特點


- 1.1. Exceptionally high Q.
- 1.2. Handles up to 5.6 Amps current.
- 1.3. Flat top and bottom for reliable pick and place and mechanical stability.
- 1.4. Solder coated leads ensure excellent solderability.
- 1.5. High reliability tests comply with AEC-Q200.

包裝訊息


包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重t(gram)	濕敏等級
13	Plastic type	2	0.052	1

特性曲線

感值頻率曲線

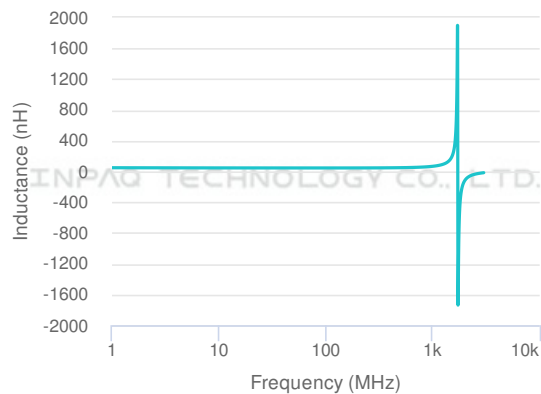

Q值頻率曲線

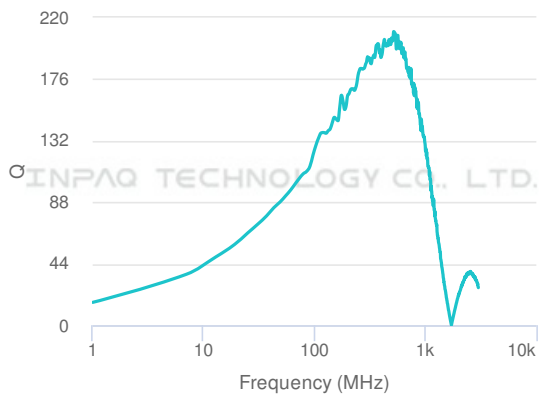

Z值頻率曲線

