
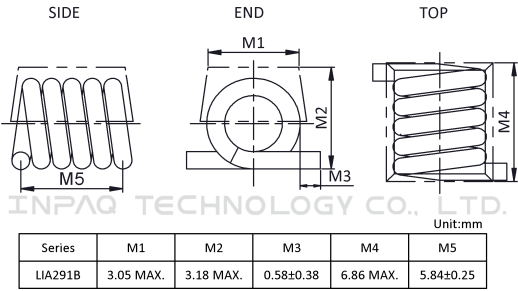


LIA291B28N_

□□□

外觀&形狀

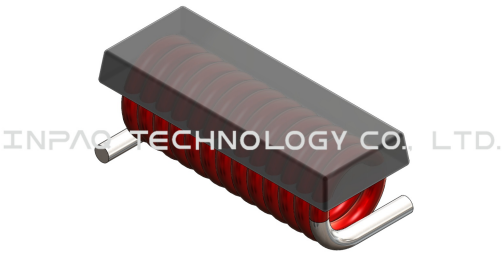

規格

長(公釐)	6.86(Max)
寬(公釐)	3.05(Max)
高(公釐)	3.18(Max)
感值(nH)	28
公差	G($\pm 2\%$),J($\pm 5\%$)
測試頻率(MHz)	150
最大值直流阻抗(m Ω)	6
最大溫升電流(A)	4
品質因素	112
自我諧振頻率[MHz]	1800
操作溫度 $^{\circ}\text{C}$	-40~+125

特點

- 1.1. Inductance values from 17.5 nH to 43.0 nH (tolerances as low as 2%).
- 1.2. Tight tolerance can eliminate circuit tuning.
- 1.3. Flat top for mechanical stability and reliable pick and place operations.
- 1.4. Exceptionally high Q over a wide frequency range.
- 1.5. Highest possible self resonance (greater than 2.2 GHz).
- 1.6. Solder coated leads ensure reliable soldering.
- 1.7. High reliability tests comply with AEC-Q200.

包裝訊息

包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重t(gram)	濕敏等級
7	Plastic type	0.5	0.056	1

特性曲線

