



LIA291A8N0_

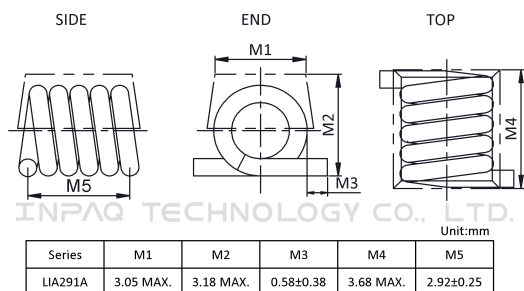

外觀&形狀

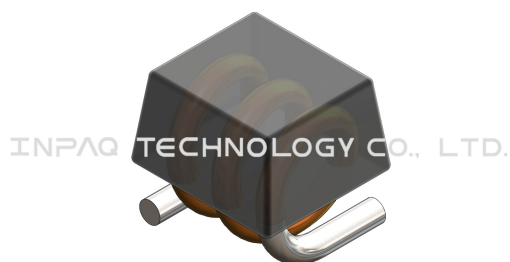

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

規格

長(公釐)	3.68(Max)
寬(公釐)	3.05(Max)
高(公釐)	3.18(Max)
感值(nH)	8
公差	G($\pm 2\%$), J($\pm 5\%$), K($\pm 10\%$)
測試頻率(MHz)	150
最大值直流阻抗(m Ω)	2.6
最大溫升電流(A)	4
品質因素	140
自我諧振頻率[MHz]	5000
操作溫度 $^{\circ}\text{C}$	-40~+125

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

特點

- 1.1. Inductance values from 2.5 nH to 18.5nH (tolerances as low as 2%).
- 1.2. Tight tolerance can eliminate circuit tuning.
- 1.3. Flat top for mechanical stability and reliable pick and place operations.
- 1.4. Exceptionally high Q over a wide frequency range.
- 1.5. Highest possible self resonance (greater than 12.5 GHz).
- 1.6. Solder coated leads ensure reliable soldering.
- 1.7. High reliability tests comply with AEC-Q200.

包裝訊息

包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重t(gram)	濕敏等級
7	Plastic type	0.5	0.028	1

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/3

- 1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
- 2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。