



LSI293A47N_

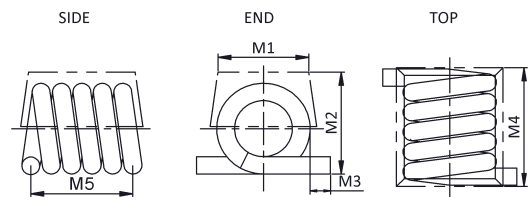

外觀&形狀

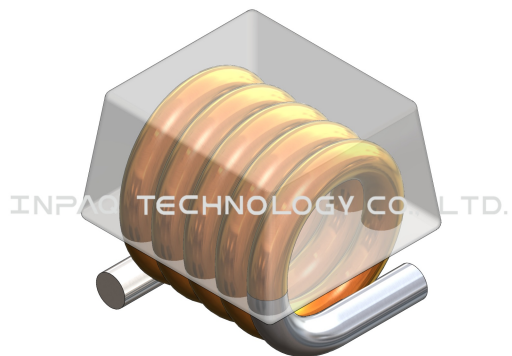

INPAQ TECHNOLOGY CO., LTD.

Series	M1	M2	M3	M4	M5
LSI293A	3.81 MAX.	4.2 MAX.	1.53±0.39	4.83 MAX.	4.32±0.39

Unit:mm

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

外觀&形狀

長(公釐)	4.83(Max)
寬(公釐)	3.81(Max)
高(公釐)	4.2(Max)
感值(nH)	47
公差	G(±2%),J(±5%),K(±10%)
測試頻率(MHz)	150
最大值直流阻抗(mΩ)	5.6
最大溫升電流(A)	3
品質因素	100
自我諧振頻率[MHz]	2100
操作溫度℃	-25~+125

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

特點

- 1.1. Inductance values from 22 nH to 120 nH.
- 1.2. Exceptionally high Q even at low frequencies; Handles up to 3.5 Amps current.
- 1.3. Tight tolerance (as low as $\pm 2\%$) can eliminate circuit tuning.
- 1.4. Flat top jacket for mechanical stability and reliable pick and place operations.
- 1.5. Solder coated leads ensure reliable soldering.

包裝訊息

包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重(gram)	濕敏等級
13	Plastic type	1	0.125	1

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/3

- 1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
- 2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。