



MCB3216S121KBE



外觀&形狀

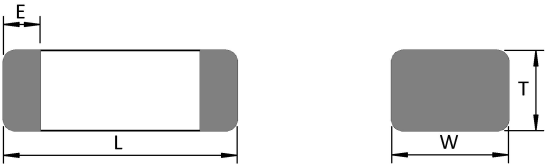

INPAQ TECHNOLOGY CO., LTD.




L	3.20±0.20
W	1.60±0.20
T	1.10±0.20
E	0.50±0.30

(unit:mm)

規格

長(公釐)	3.2±0.20
寬(公釐)	1.6±0.20
高(公釐)	1.1±0.20
尺寸代碼 英吋(公釐)	1206(3216)
阻抗值(Ω)	120
公差(%)	±25
測試頻率(MHz)	100
最大值直流阻抗(Ω)	0.15
最大值溫升電流 at 85°C(mA)	800
操作溫度 °C	-55~+125

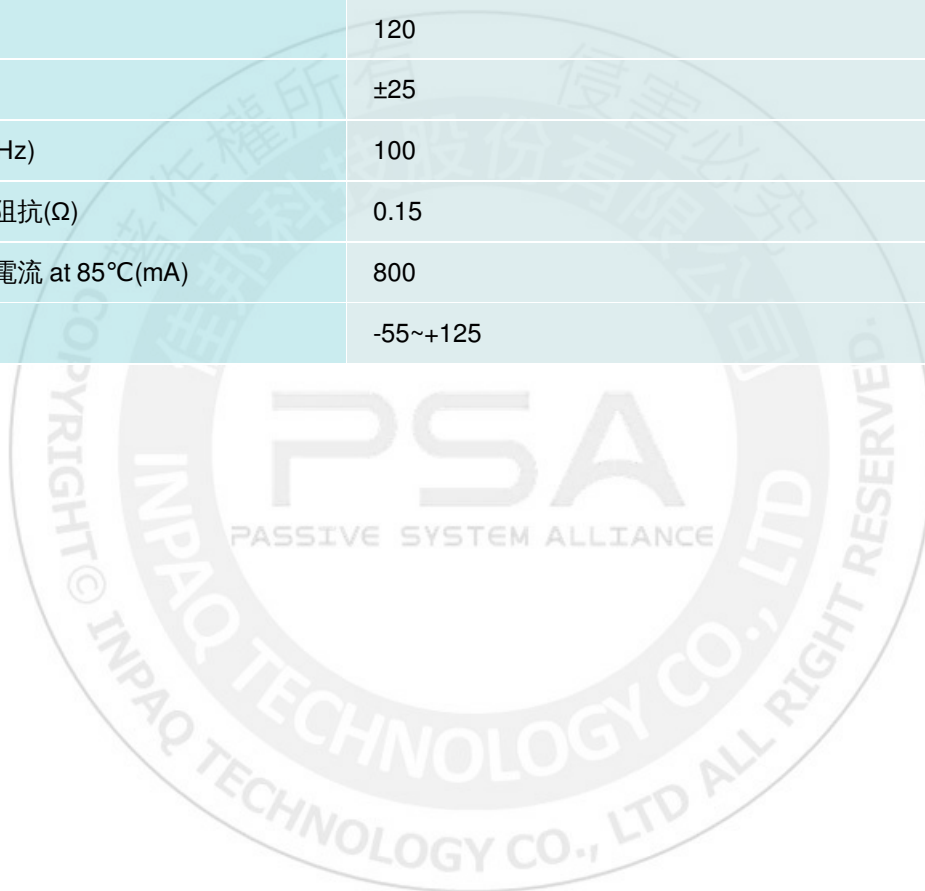

特點

- Monolithic inorganic material construction
- Closed magnetic circuit avoids crosstalk
- SMD Type & suitable for reflow and wave soldering
- Available in various sizes
- Excellent solderability and heat resistance
- High reliability
- Effectively filtering capability over a wide range of frequency

包裝訊息

包裝尺寸(Inch)	包裝類型	標準包裝(PCS)	單重(gram)	濕敏等級
7	Plastic type	3000	0.0271	1

