


# MLVG06030R5IV28BP



## 外觀&形狀

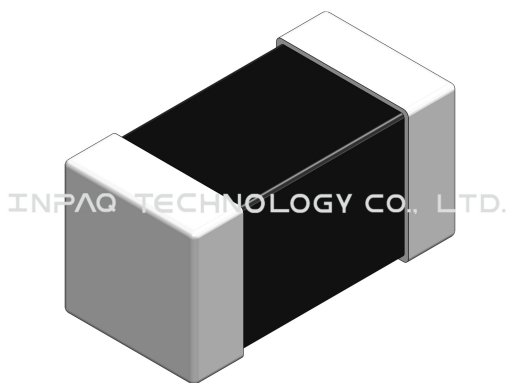

| Unit:mm | 0402      | 0603      |
|---------|-----------|-----------|
| L       | 0.96±0.12 | 1.60±0.15 |
| W       | 0.48±0.07 | 0.80±0.10 |
| T       | 0.50±0.10 | 0.80±0.10 |
| C       | 0.25±0.15 | 0.30±0.20 |

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## 規格

|             |             |
|-------------|-------------|
| 長(公釐)       | 1.6         |
| 寬(公釐)       | 0.8         |
| 高(公釐)       | 0.8         |
| 尺寸代碼 英吋(公釐) | 0603 (1608) |
| 工作電壓(V)     | 28          |
| 崩潰電壓(V)     | 46          |
| 崩潰電壓(V)     | 60          |
| 箝制電壓(A)     | 1           |
| 箝制電壓(V)     | 110         |
| 電容(KHZ)     | 1000        |
| 電容(pF)      | 0.1         |
| 電容(pF)      | 1.9         |

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## 特點

VDC – Maximum DC operating voltage the varistor can maintain and not exceed 10μA leakages current

VV – Voltage across the device measured at 1mA DC current. Equivalent to Vb, “break down voltage”.

Vc – Maximum peak voltage across the varistor measured at 8/20us waveform and 1A pulse current

\*: Maximum peak current across the varistor with 8/20μs waveform and 0.5A pulse current.

Cp – Device capacitance measured with 1 Vrms at 1MHz

## 包裝訊息

| 包裝尺寸(Inch) | 載帶         | 標準包裝(KPCS) | 單重(gram)  | 濕敏等級 |
|------------|------------|------------|-----------|------|
| 7          | Paper type | 4          | 0.0047375 | 1    |

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。