



WFI2520FS5R6_

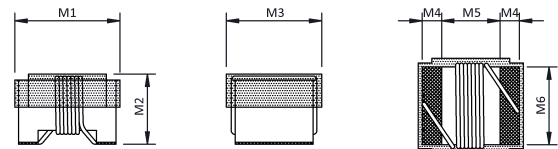

外觀&形狀

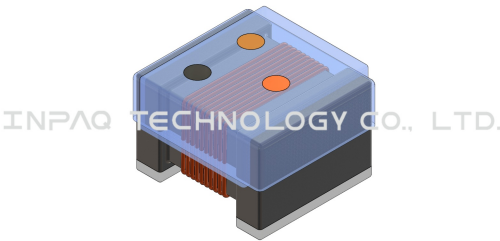

INPAQ TECHNOLOGY CO., LTD.

Unit:mm						
Series	M1	M2	M3	M4	M5	M6
WFI2520FS	2.92 MAX.	1.83±0.2	2.59±0.2	0.50±0.1	1.51±0.1	2.03±0.1



規格

長(公釐)	2.92(Max)
寬(公釐)	2.59±0.2
高(公釐)	1.83±0.25
尺寸代碼 英吋(公釐)	1008/2520
感值(uH)	5.6
公差	J(±5%),K(±10%)
測試頻率(MHz)	7.9
最大值直流阻抗(Ω)	1.82
最大溫升電流(mA)	380
品質因素	31
自我諧振頻率[MHz]	80
操作溫度℃	-25~+125

特點

- 1.1. Ferrite core wire wound construction.
- 1.2. High Reliability due to wire wound type construction.
- 1.3. Inductance values from 0.047 to 22 μ H.
- 1.4. Application for DC power line.

包裝訊息

包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重(gram)	濕敏等級
7	Plastic type	2	0.0363	1