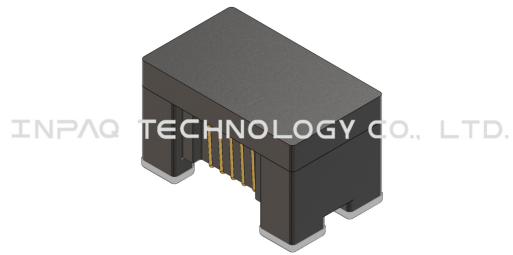

SCA2012FS361M

□□□

外觀&形狀



規格

長(公釐)	2.0±0.2
寬(公釐)	1.2±0.2
高(公釐)	1.2±0.2
尺寸代碼 英吋(公釐)	0805/2012
阻抗值(Ω)	360
公差	M(±20%)
測試頻率(MHz)	100
最大值直流阻抗(Ω)	0.5
最大額定電流(mA)	300
額定電壓(Vdc)	50
耐壓(Vdc)	125
絕緣阻抗(MΩ)	10
操作溫度℃	-40~+125

特點

- 1.1. Small wire-wound SMD common mode filter: 2.0x1.2x1.2mm.
- 1.2. It can suppress noise for high-speed differential signal lines without destroying signal waveforms.
- 1.3. Maintain the required common-mode filtering characteristics,the impedance to common-mode noise can be cleared, and has excellent EMC suppression ability.
- 1.4. The differential mode impedance is suppressed and has almost no effect on high-speed signals.
- 1.5. High reliability tests comply with AEC-Q200.

包裝訊息

包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重(gram)	濕敏等級
7	Plastic type	2	0.012	1

特性曲線
