



# LIA294AR24\_

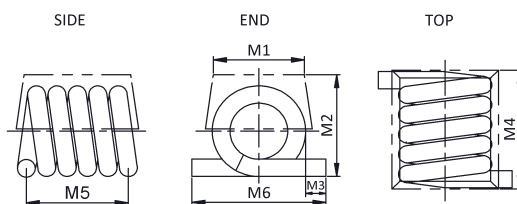

## 外觀&形狀

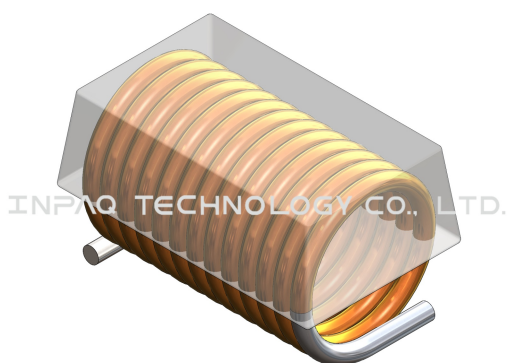

INPAQ TECHNOLOGY CO., LTD. Unit:mm

Series	M1	M2	M3	M4	M5	M6
LIA294A	6.35 MAX.	5.9 MAX.	1.02±0.39	10.55 MAX.	7.98±0.51	7.12 MAX.



注意 NOTICE: All Specifications are subject to change without notice.

Page 1/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## 外觀&形狀

長(公釐)	10.55(Max)
寬(公釐)	6.35(Max)
高(公釐)	5.9(Max)
感值(nH)	246
公差	G( $\pm 2\%$ ),J( $\pm 5\%$ )
測試頻率(MHz)	50
最大值直流阻抗(m $\Omega$ )	35
最大溫升電流(A)	3
品質因素	95
自我諧振頻率[MHz]	685
操作溫度 $^{\circ}\text{C}$	-40~+125

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## 特點

- 1.1. Inductance values from 90 nH to 538 nH.
- 1.2. Exceptionally high Q even at low frequencies.
- 1.3. Handle up to 3.5 Amps current.
- 1.4. Tight tolerance (as low as  $\pm 2\%$ ) can eliminate circuit tuning.
- 1.5. Flat top case for mechanical stability and reliable pick and place operations.
- 1.6. Solder coated leads ensure reliable soldering.
- 1.7. High reliability tests comply with AEC-Q200.

## 包裝訊息

包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重(gram)	濕敏等級
13	Plastic type	1	0.37	1

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。