
LIA294AR24_

HF

外觀&形狀

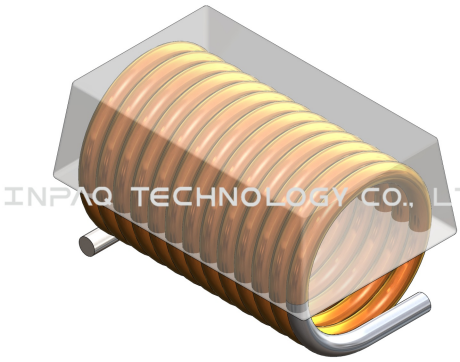

規格

長(公釐)	10.55(Max)
寬(公釐)	6.35(Max)
高(公釐)	5.9(Max)
感值(nH)	246
公差	G(±2%),J(±5%)
測試頻率(MHz)	50
最大值直流阻抗(mΩ)	35
最大溫升電流(A)	3
品質因素	95
自我諧振頻率[MHz]	685
操作溫度℃	-40~+125

特點

1.1. Inductance values from 90 nH to 538 nH.

1.2. Exceptionally high Q even at low frequencies.

1.3. Handle up to 3.5 Amps current.

1.4. Tight tolerance (as low as ±2%) can eliminate circuit tuning.

1.5. Flat top case for mechanical stability and reliable pick and place operations.

1.6. Solder coated leads ensure reliable soldering.

1.7. High reliability tests comply with AEC-Q200.

包裝訊息

包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重t(gram)	濕敏等級
13	Plastic type	1	0.37	1