



# VEFL2C0630-1R5MPA

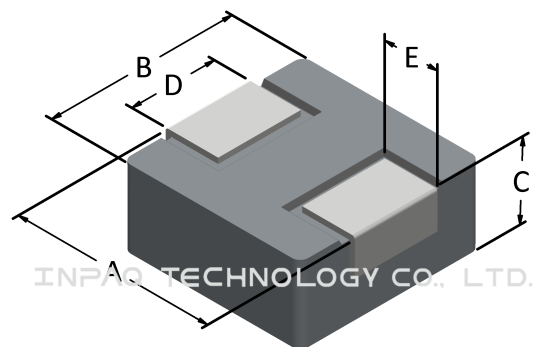

## 外觀&形狀

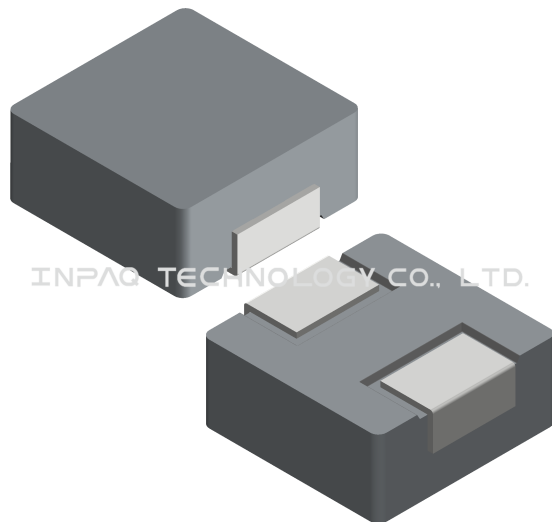

| Series         | A (mm)  | B (mm)  | C (mm)  | D (mm)  | E (mm)  |
|----------------|---------|---------|---------|---------|---------|
| VEFLxC0530-MPA | 5.7±0.3 | 5.4±0.3 | 3.0max. | 2.1±0.2 | 1.5±0.3 |
| VEFLxC0630-MPA | 7.1±0.4 | 6.5±0.3 | 3.0max. | 3.0±0.2 | 2.0±0.4 |
| VEFLxC0654-MPA | 7.1±0.4 | 6.5±0.3 | 5.4max. | 3.0±0.2 | 2.0±0.4 |

注意 NOTICE: All Specifications are subject to change without notice.

Page 1/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

 規格

|             |                    |
|-------------|--------------------|
| 長(公釐)       | 7.1±0.4            |
| 寬(公釐)       | 6.5±0.3            |
| 高(公釐)       | 3.0 max.           |
| 尺寸代碼 英吋(公釐) | 0630               |
| 感值(uH)      | 1.5                |
| 典型值直流阻抗(mΩ) | 5.9                |
| 最大值直流阻抗(mΩ) | 6.5                |
| 典型值飽和電流(A)  | 15                 |
| 最大飽和電流(A)   | 13.2               |
| 典型值溫升電流(A)  | 14                 |
| 最大溫升電流(A)   | 12.7               |
| 品質因素        | 40                 |
| 自我諧振頻率      | 25                 |
| 耐壓(VDC)     | 30VDC              |
| 操作溫度(°C)    | - 40 °C to +125 °C |

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## 特點

Note 1: Customized design is available, please contact us.

Note 2: All test referenced to 25°C ambient

Note 3: Inductance tolerance +/- 20%

Note 4: Inductance is measured with with LCR meters WK6500B(Wayne Kerr) or equivalent.at 1MHz/1V.

Note 5: DC resistance is measured with HIOKI® micro-ohm meter RM3543 or equivalent.

Note 6: Isat means that DC current will cause a 30% inductance reduction from initial value.

Note 7: Irms means that DC current will cause coil temp. rising to 40°C whichever is smaller.

Note 8: Withstand voltage is 30V DC.

## 包裝訊息

| 包裝尺寸(Inch) | 標準包裝(KPCS) | 單重(gram) | 濕敏等級 |
|------------|------------|----------|------|
| 13         | 1          | 0.805    | 1    |


注意 NOTICE: All Specifications are subject to change without notice.

Page 3/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。

2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。


## 特性曲線

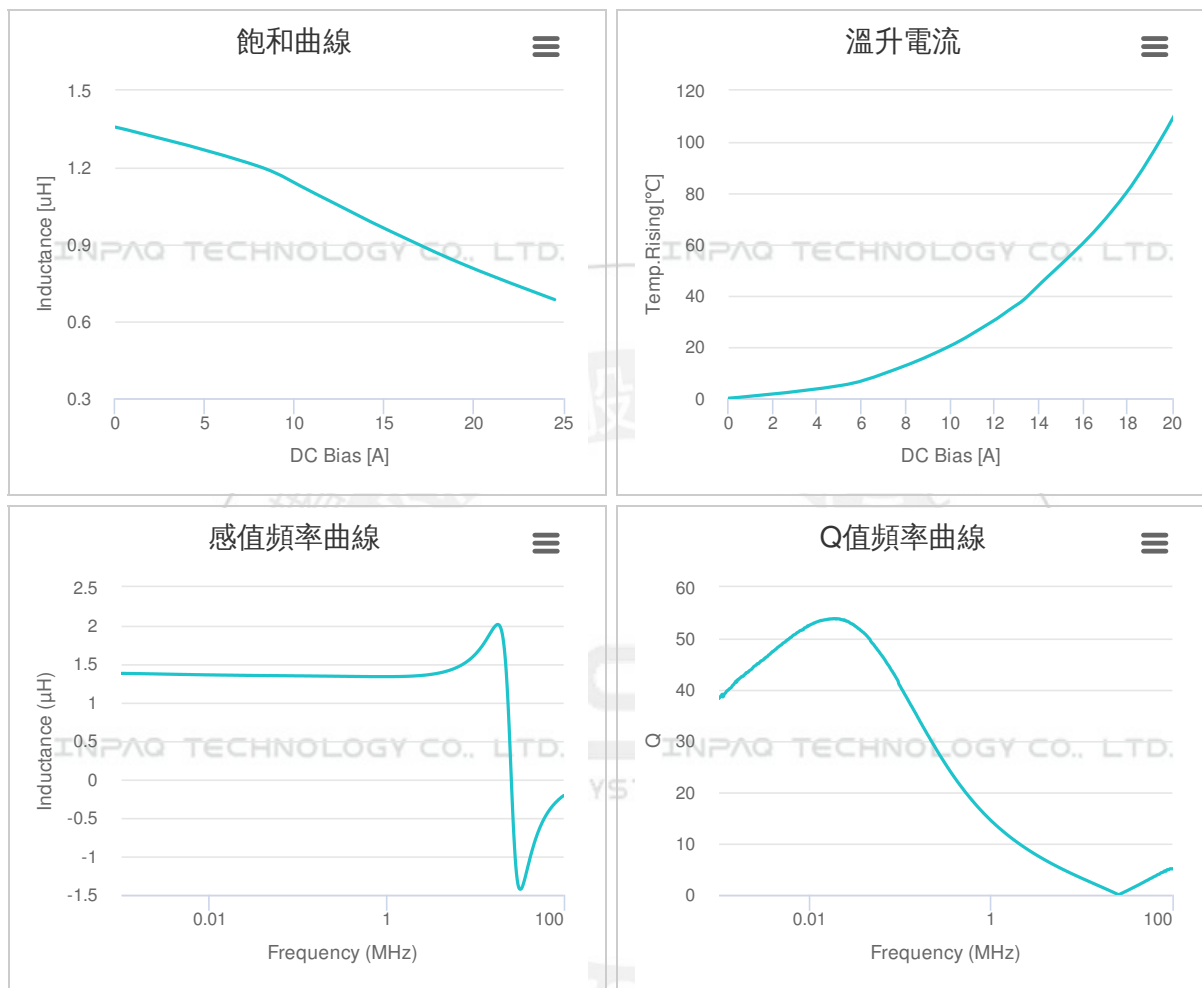

注意 NOTICE: All Specifications are subject to change without notice.

Page 4/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

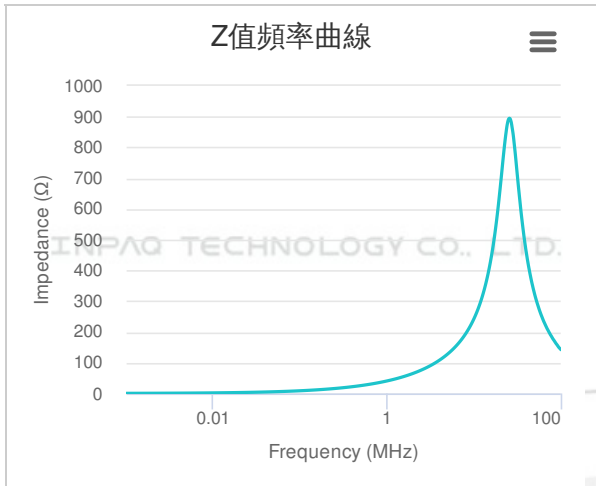

注意 NOTICE: All Specifications are subject to change without notice.

Page 5/5

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。