


# CSME0645D-2R2N



## 外觀&形狀

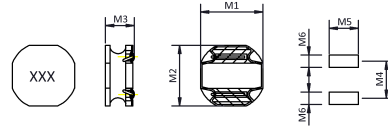

Unit:mm						
ITEM	M1	M2	M3	M4	M5	M6
DIM.	6.00	5.90	4.50	4.70	5.70	1.60
TOL.	±0.2	±0.2	MAX.			

INPAQ TECHNOLOGY CO., LTD.

INPAQ TECHNOLOGY CO., LTD.




注意 NOTICE: All Specifications are subject to change without notice.

Page 1/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## 規格

長(公釐)	6.0±0.2
寬(公釐)	5.9±0.2
高(公釐)	4.5 Max.
尺寸代碼 英吋(公釐)	0645
感值(uH)	2.2±30%
最大值直流阻抗(mΩ)	23.9
典型值飽和電流(A)	6
典型值溫升電流	4.5
操作溫度	-25°C to +120°C

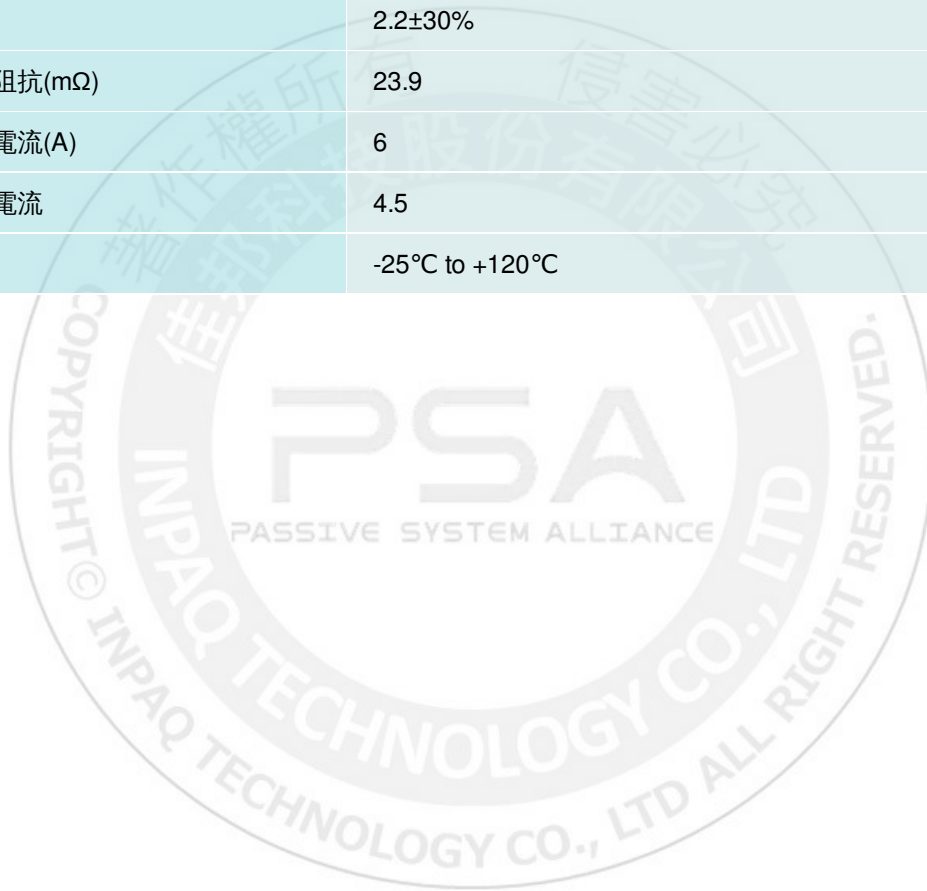

注意 NOTICE: All Specifications are subject to change without notice.

Page 2/3

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

## 特點

- High saturation current realized by material properties and structure design.
- Low DC resistance to achieve high conversion efficiency and lower temperature rising.
- Low Profile: 6.0 mm × 5.9 mm × 4.5 mm.
- Magnetically shielded structure to accomplish high resolution in EMC protection.
- Halogen free, Lead Free, RoHS Compliance.
- Surface marking : None.
- The moisture sensitivity level (MSL) of products is level 1.

## 包裝訊息

包裝尺寸(Inch)	標準包裝(KPCS)	單重(gram)	濕敏等級
13	1.5	0.59	1

注意 NOTICE: All Specifications are subject to change without notice.

Page 3/3

- 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
- 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。