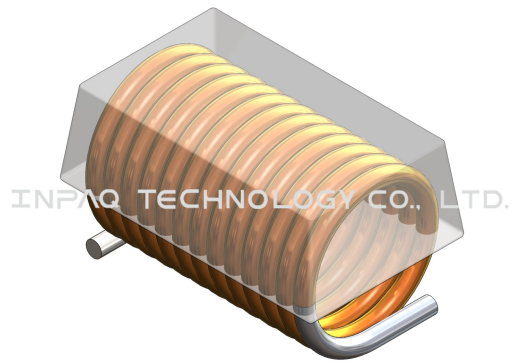

LIA294AR54_

□□□

外觀&形狀



規格

長(公釐)	10.55(Max)
寬(公釐)	6.35(Max)
高(公釐)	5.9(Max)
感值(nH)	538
公差	G($\pm 2\%$),J($\pm 5\%$)
測試頻率(MHz)	50
最大值直流阻抗(m Ω)	90
最大溫升電流(A)	2
品質因素	87
自我諧振頻率[MHz]	490
操作溫度 $^{\circ}\text{C}$	-40~+125

特點

- 1.1. Inductance values from 90 nH to 538 nH.
- 1.2. Exceptionally high Q even at low frequencies.
- 1.3. Handle up to 3.5 Amps current.
- 1.4. Tight tolerance (as low as $\pm 2\%$) can eliminate circuit tuning.
- 1.5. Flat top case for mechanical stability and reliable pick and place operations.
- 1.6. Solder coated leads ensure reliable soldering.
- 1.7. High reliability tests comply with AEC-Q200.

包裝訊息

包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重t(gram)	濕敏等級
13	Plastic type	1	0.37	1