

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.


# MHC4532S601QBE

一般用 ROHS HF

## 外觀&形狀

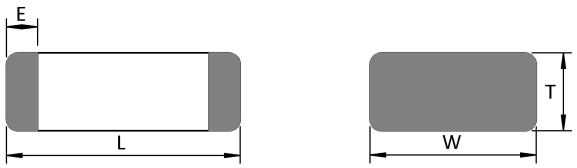

| | |
|---|---|
| L | 4.50±0.25 |
| W | 3.20±0.25 |
| T | 1.50±0.25 |
| E | 0.60±0.40 |

(unit:mm)

INPAQ TECHNOLOGY CO., LTD.
INPAQ TECHNOLOGY CO., LTD.



注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

## 規格

| | |
|---|---|
| 長(公釐) | 4.5±0.25 |
| 寬(公釐) | 3.2±0.25 |
| 高(公釐) | 1.5±0.25 |
| 尺寸代碼 英吋(公釐) | 1812(4532) |
| 阻抗值(Ω) | 600 |
| 公差(%) | ±25 |
| 測試頻率(MHz) | 50 |
| 最大值直流阻抗(Ω) | 0.04 |
| 最大值溫升電流 at 85℃(mA) | 3000 |
| 操作溫度 ℃ | -55~+125 |


注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

## 特點

●Combination of high frequency noise suppression with capability of handing high current

●The current rating up to 6 Amps with low DCR

## 包裝訊息


| 包裝尺寸(Inch) | 包裝類型 | 標準包裝(PCS) | 單重(gram) | 濕敏等級 |
|---|---|---|---|---|
| 7 | Plastic type | 1000 | 0.1125 | 1 |

COPYRIGHT© INPAQ TECHNOLOGY CO., LTD ALL RIGHT RESERVED.
PSA PASSIVE SYSTEM ALLIANCE


注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

## 特性曲線

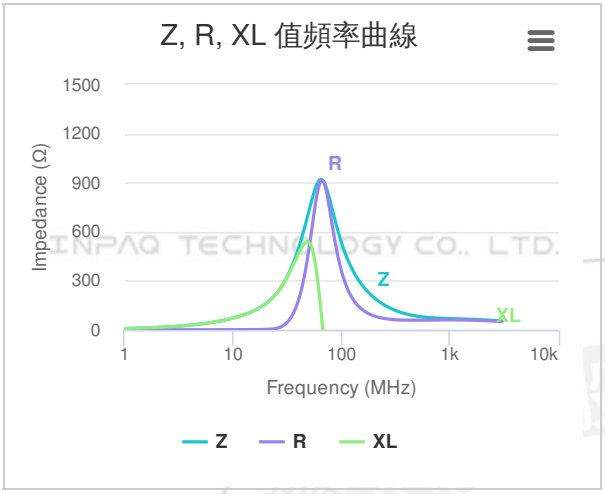


INPAQ TECHNOLOGY CO., LTD.
PASSIVE SYSTEM ALLIANCE
COPYRIGHT© INPAQ TECHNOLOGY CO., LTD ALL RIGHT RESERVED.



注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。