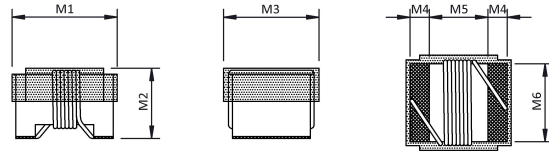

WCA1608CP68N_

□□□

外觀&形狀



INPAQ TECHNOLOGY CO., LTD.

Series	M1	M2	M3	M4	M5	M6
WCA1608CP	1.8 MAX.	1.02 MAX.	1.12 MAX.	0.28±0.1	0.96±0.1	0.76±0.1

Unit:mm

規格

長(公釐)	1.8(Max)
寬(公釐)	1.12(Max)
高(公釐)	1.02(Max)
尺寸代碼 英吋(公釐)	0603/1608
感值(nH)	68
公差	G($\pm 2\%$),J($\pm 5\%$)
測試頻率(MHz)	200
最大值直流阻抗(Ω)	0.34
最大溫升電流(mA)	600
品質因素	37
自我諧振頻率[MHz]	1700
操作溫度 $^{\circ}\text{C}$	-40~+125

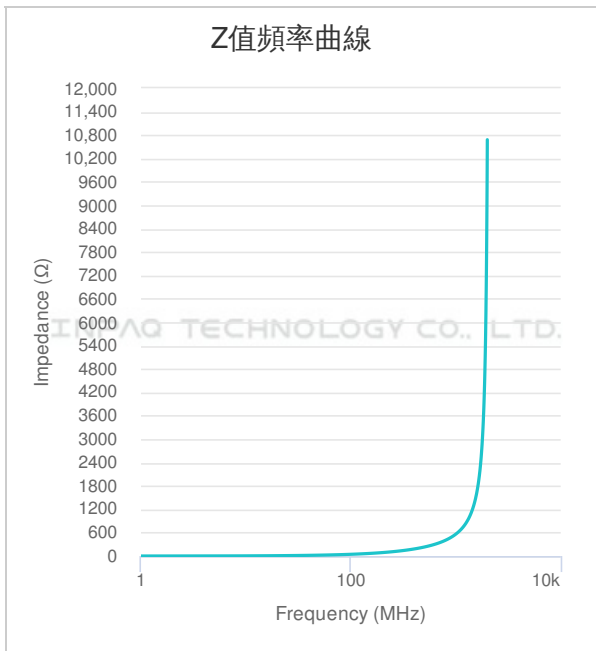
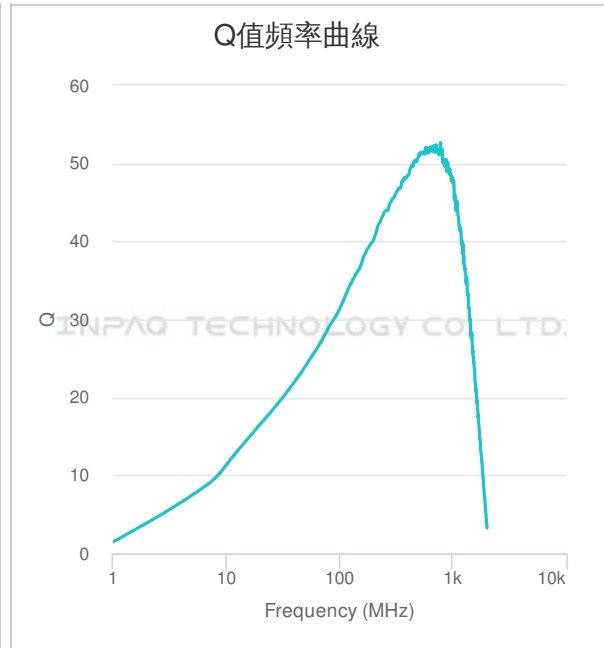
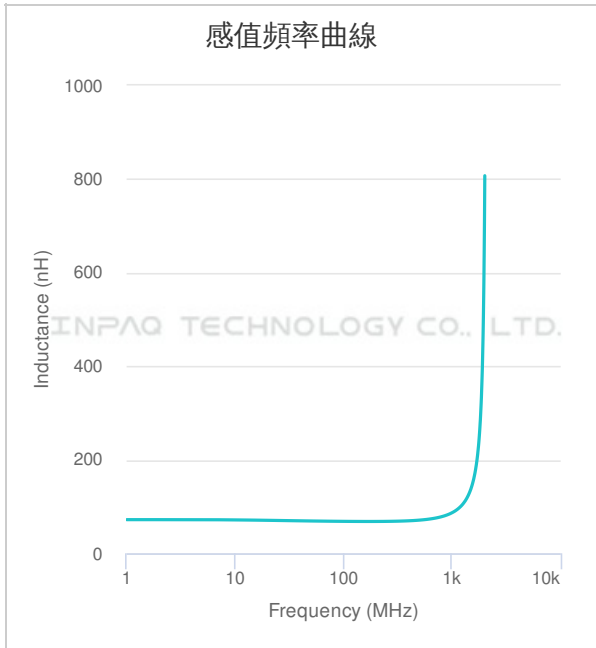
特點

- 1.1. Ceramic core wire wound construction.
- 1.2. Excellent inductance accuracy.
- 1.3. Inductance values from 1.6 to 470 nH.
- 1.4. Exceptional Q and high SRF special for high frequency applications.
- 1.5. High reliability tests comply with AEC-Q200.

包裝訊息

包裝尺寸(Inch)	載帶	標準包裝(KPCS)	單重(gram)	濕敏等級
7	Plastic type	4	0.00344	1

特性曲線



注意 NOTICE: All Specifications are subject to change without notice.

Page 4/4

1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。