

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.


MCI1608HQ68N_HBP

一般用 ROHS HF

外觀&形狀

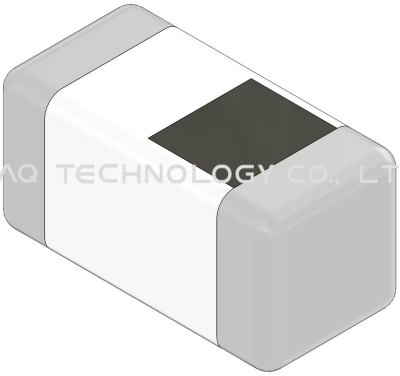

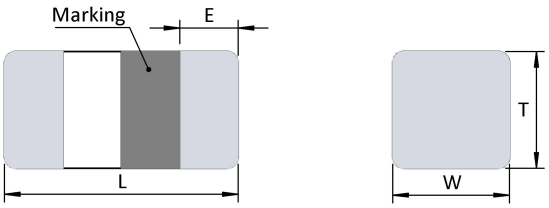



L	1.60±0.15
W	0.80±0.15
T	0.80±0.15
E	0.40±0.20

(unit:mm)

INPAQ TECHNOLOGY CO., LTD.
INPAQ TECHNOLOGY CO., LTD.
© INPAQ TECHNOLOGY CO., LTD ALL RIGHT

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

規格

長(公釐)	1.6±0.15
寬(公釐)	0.8±0.15
高(公釐)	0.8±0.15
尺寸代碼 英吋(公釐)	0603(1608)
感值(nH)	68
公差	J(±5%)
測試頻率(MHz)	100
最大值直流阻抗(Ω)	0.85
最大溫升電流(mA)	400
最小值品質因素	12
最小值自我諧振頻率(MHz)	700
操作溫度℃	-55~+125

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

特點

●Particular ceramic material and coil structure provide high frequency application range up to 10GHz.

●Small size and low profile.

●Available in various sizes.

●Excellent solderability and heat resistance.

包裝訊息


包裝尺寸(Inch)	包裝類型	標準包裝(PCS)	單重(gram)	濕敏等級
7	Paper type	4000	0.00285	1


著作權所有 侵害必究 佳邦科技股份有限公司 PSA PASSIVE SYSTEM ALLIANCE INPAQ TECHNOLOGY CO., LTD COPYRIGHT© INPAQ TECHNOLOGY CO., LTD ALL RIGHT RESERVED


注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。

All specifications are subject to change without notice.
Copyright © INPAQ Technology Co., Ltd. All rights reserved.

特性曲線

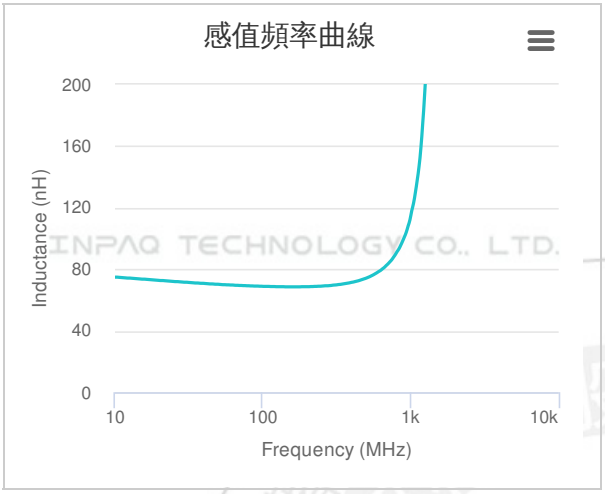

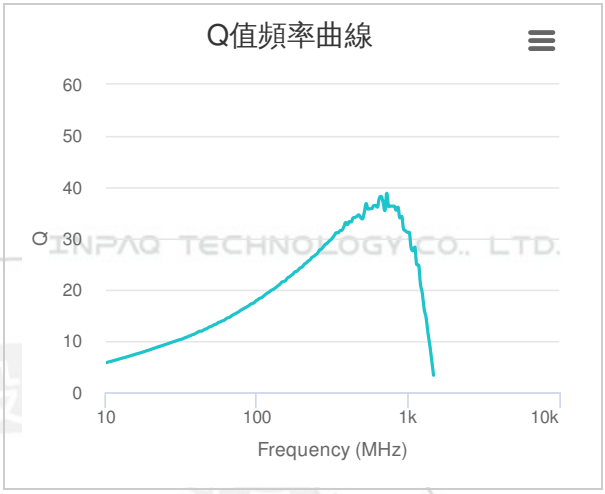

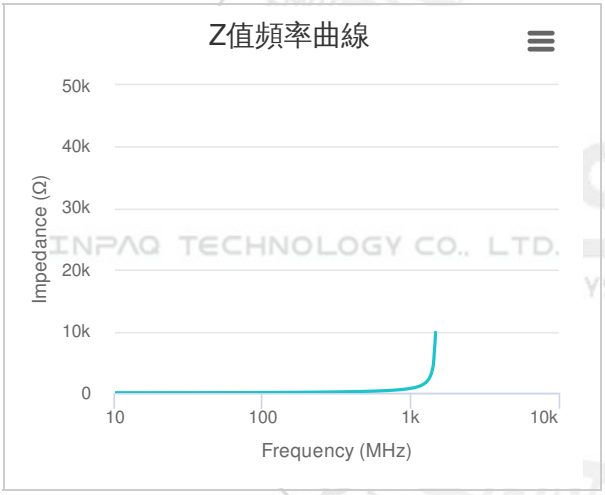

注意 NOTICE: All Specifications are subject to change without notice.
1. 本文件由 INPAQ 佳邦科技網站下載，若規格變更及停產，請於訂購時確認，恕不另行通知。
2. 本文件僅說明參考標準規格，如需訂購，請依實際核准所需規格進行申辦。